


PHILATRON

## PHILATRON

Festoon Crane Power Cables

UL Listed +105°C - 600 Volts

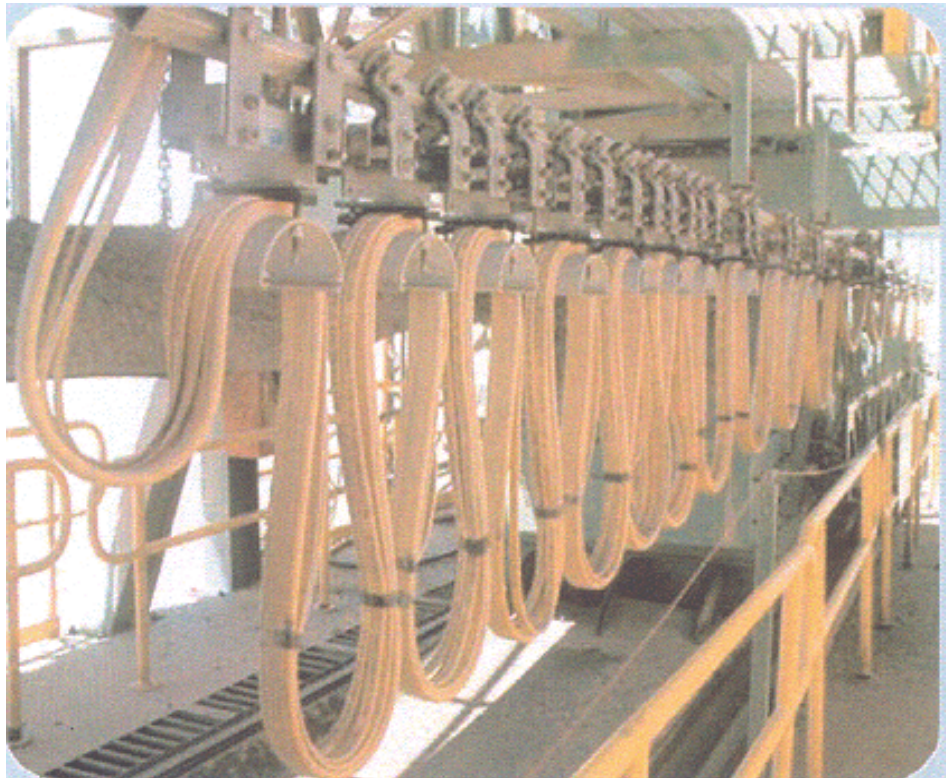

# PHILATRON

**PHILAFLEX™ 600 Volt Power**  
**Festoon Cables**  
**UL Listed 105°C**



**Application:** Cranes, hoists or any equipment which travels with lateral traversing motion. Also suited for trucks and trailers where flat cable is desired over round cable.

**Standards:** UL & CSA Listed Under PHILATRON - 600 Volts

**Temperature:** +105°C - 30°C

**Jacket Color:** Black, Yellow, or Customer's Custom Color

**Color Code:** 1-Blk, 2- Red, 3-Blu, 4-Ora, 5-Yel, 6-Bro, 7-Red/Blk, 8-Blu/Blk, 9-Ora/Blk, 10-Yel/Blk, 11-Bro/Blk, 12-Blk/Red

Catalog Number	Size	No. of Conductors	Strands	Nom. Wall	Diam. Inches	Lbs.Mft.
FT1612	16	12	65	.030	.200 x 1.605	270
FT1608	16	8	65	.030	.200 x 1.110	180
FT1412	14	12	41	.030	.210 x 1.700	340
FT1408	14	8	41	.030	.210 x 1.175	220
FT1404	14	4	41	.030	.210 x .625	160
FT1208	12	8	65	.030	.230 x 1.340	320
FT1205	12	5	65	.030	.230 x .865	210
FT1204	12	4	65	.030	.230 x .710	160
FT1004	10	4	105	.030	.270 x .880	240
FT0804	8	4	168	.045	.365 x 1.190	420
FT0605	6	5	266	.060	.430 x 1.735	800
FT0604	6	4	266	.060	.430 x 1.450	600
FT0404	4	4	420	.060	.490 x 1.690	750
FT0204	2	4	665	.060	.560 x 1.955	1270
FT2/004	2/0	4	1330	.080	.775 x 2.700	2575

Shielded Flat Cable, Each Conductor Shielded, Black Jacket						
FT1612PIS	16	12	65	.030	.240 x 2.110	460
FT1608PIS	16	8	65	.030	.240 x 1.445	220
FT1604PIS	16	4	65	.030	.240 x .760	160

*Industrial Cable Division--(800)483-1560 • Fax (562) 921 5770*