


PHILATRON
WIRE AND CABLE • USA MANUFACTURER

HEAVY DUTY TRUCKING PRODUCTS

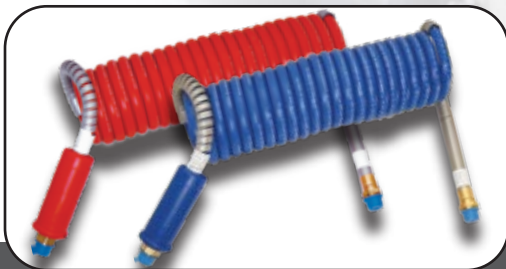

Manufacturing Ultra Durable USA
Products that will ensure Safety,
Savings and Value!

STALLION BRAND

philatron.com

TABLE OF CONTENTS



The Difference Between Xenoy and Metal Plugs	2
Our Best ABS Coiled Cables With Xenoy Plugs	3
Our Best ABS Straight Cables With Xenoy Plugs	4
Straight and Coiled Cables with ISO Xenoy Plugs	5
Straight Air Hose Assemblies	6
Our Standard Coiled Air Lines - The 400 Series - 1 Yr. Warranty	7
The Difference Between Stallion and Nylon Coiled Air hoses	8
Our Best Stallion Power Coiled Air Lines - The 600 Series - 3 Yr. Warranty	9
Our Ultimate Alaskan Stallion Air Lines- The A-600 Series - 3 Yr. Warranty	10
Our Ultimate Alaskan Stallion Air Lines- The A-600 Series - Sizes and Lengths	11
Stallion Air Lines and Power Cables Barrel Options	12
Coiled Lift Gate Cable Assemblies	13
The Ultimate Grounding Cable	14
Battery, Ground, Starter & Generator Cable	15
Trailer Cable	16
Shop & Cab Accessories: Coiled Extension Cords	17
Booster Cables	18
Towing Lights	19

DO YOU KNOW THE DIFFERENCE?

Xenoy® vs Metal Plugs



Xenoy is a hi-tech poly carbonate that is pound per pound approximately five times stronger than steel and 20 times stronger than the die cast zinc used to make metal plugs.

PHILATRON XENOY PLUG

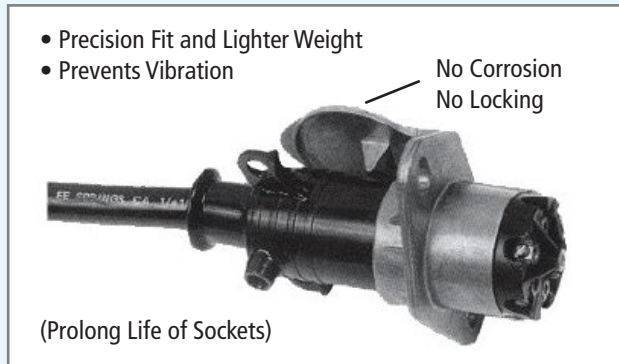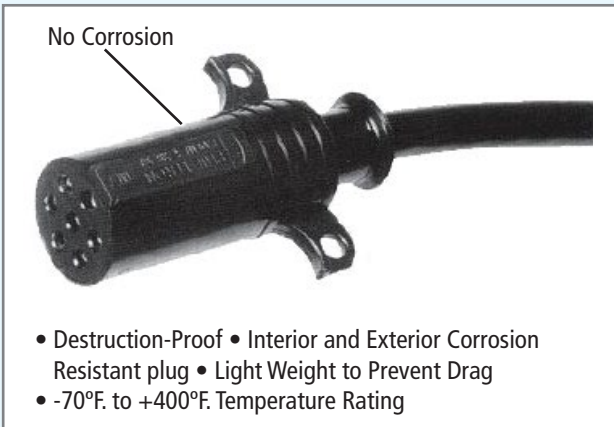

- Very Low Maintenance Cost
- Maximum reliability. Spring loaded "D" Contacts for tight fitting connections

THE METAL PLUG

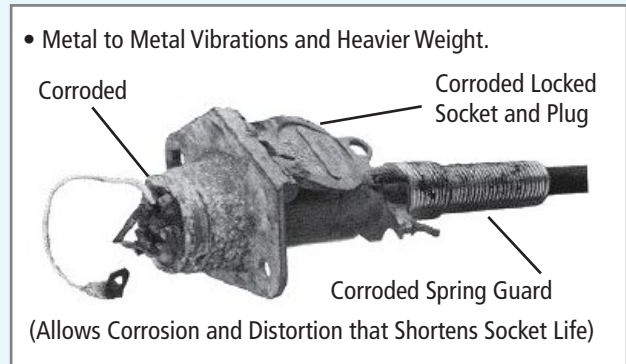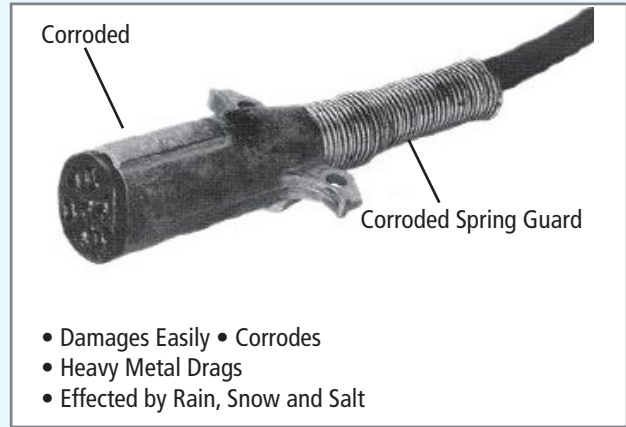

- High Maintenance Expenses
- Metal to metal vibration, crooked contacts, stripped connection pins, low CSA scores and DOT citing from Blinking Lights.

Warranty: Xenoy Plug - THREE YEARS / Metal Plug - One Year

The choice is obvious: Xenoy plugs.

Xenoy is a registered trademark of the General Electric Company.

STALLION

Our Best ABS Coiled Cables With Corrosion Resistant Xenoy® Plugs



Patent No
4,786,261

Three Year Warranty

Features: Virtually Indistinctive Xenoy Plugs with sure fitting, spring loaded "D" contacts. Interior and exterior Xenoy Plugs are corrosion resistant, and tougher than metal plugs. Temperature range is -70°F to + 400°F. Heavy duty in service, but light in weight eliminates wear and tear to electrical sockets. The Philaprene jacket construction provides a tight coil memory, maximum abrasion resistance and maximum reliability.

Standards: SAE and ATA

Warranty: Three years against plug breakage or coil memory loss. Does not cover corrosion of contacts caused by over loaded circuits due to improperly using under sized cable on heavier lighting systems.


- Sag Proof Memory • Maximum Performance at -70°F to +400°F • No Damage When Dragged or Tossed • Not Effected by Road Salt or Chemicals • Patented Socket Locking Grip Prevents Accidental Disconnect from a Pull Force of up to 420 lbs. • Extra Heavy Duty Service • Resistant to Driver's Abuse • No Wear & Tear of Sockets • Sure Fitting "D" Contacts • Chamfer Cable Guard

Catalog NO.	Working Length Ft.	7 conductor AWG Size Combination	Lead & Plugs	Cable Duty & Color
2412CL	12	4/12, 2/10, & 1/8	Two Xenoy Plugs	ABS Green
241240CL	12	4/12, 2/10, & 1/8	One Xenoy Plug & One Open 40" Lead	ABS Green
241240CL2	12	4/12, 2/10, & 1/8	Two Xenoy Plugs With 40" Lead	ABS Green
2415CL	15	4/12, 2/10, & 1/8	Two Xenoy Plugs	ABS Green
241540CL	15	4/12, 2/10, & 1/8	ONE XENOY PLUG & ONE OPEN 40" LEAD	ABS Green
241540CL2	15	4/12, 2/10, & 1/8	TWO XENOY PLUGS WITH 40" LEAD	ABS Green
2417CL	15	4/12, 2/10, & 1/8	ONE XENOY PLUG & ONE OPEN 72" LEAD	ABS Green
2417CL2	15	4/12, 2/10, & 1/8	TWO XENOY PLUGS WITH 72" LEAD	ABS Green
2420CL	20	4/12, 2/10, & 1/8	TWO XENOY PLUGS	ABS Green
2612CL	12	6/12 & 1/10	TWO XENOY PLUGS	Standard Black
2615CL	15	6/12 & 1/10	TWO XENOY PLUGS	Standard Black
261540CL	15	6/12 & 1/10	ONE XENOY PLUG & ONE OPEN 40" LEAD	Standard Black
261540CL	15	6/12 & 1/10	Two Xenoy Plugs With 40" Lead	Standard Black
2617CL	15	6/12 & 1/10	One Xenoy Plug & One Open 72" Lead	Standard Black
2617CL2	15	6/12 & 1/10	Two Xenoy Plugs with 72" Lead	Standard Black
2620CL	20	6/12 & 1/10	Two Xenoy Plugs	Standard Black
2812CL	12	6/14 & 1/12	Two Xenoy Plugs	Economy Black
2815CL	15	6/14 & 1/12	Two Xenoy Plugs	Economy Black

STALLION, symbolic for high quality and extra durability, is a registered trademark of Philatron International.
XENOY is a registered trademark of the General Electric Company.

STALLION

Our Best Straight ABS Cables With Corrosion Resistant Xenoy® Plugs

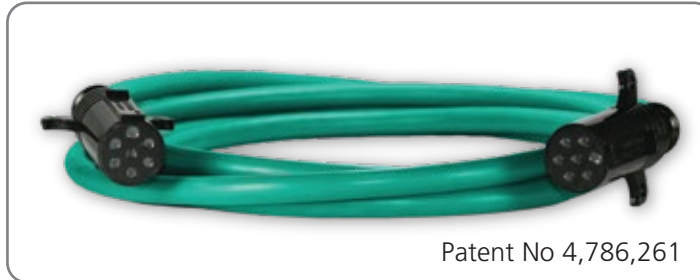

Three Year Warranty

- Maximum Performance at -70°F to +400°F • Resistant to Abuse • Not Effected by Road Salt or Chemicals
- Sure Fitting spring loaded "D" Contacts • Light weight - Heavy Duty Service • Patented Socket Locking Grip Insures Cable's Connection up to a Force of 420 lbs.


Features: Virtually **DESTRUCTION PROOF** Xenoy plugs with **sure fitting** spring loaded D" contacts. Xenoy plugs are corrosion proof and are tougher than metal plugs. Temperature range is -70°F to + 400°F. Heavy duty in service, but light in weight eliminates wear and tear to electrical sockets. The Philaprene jacket construction provides maximum abrasion resistance and maximum reliability.

Standards: SAE and ATA

Warranty: Three years against plug breakage or coil memory loss. Does not cover corrosion of contacts caused by over loaded circuits due to improperly using under sized cable on heavier lighting systems.

Catalog NO.	Working Length Ft.	7 conductor AWG Size Combination	Lead & Plugs	Cable Duty & Color
2408SL	8	4/12, 2/10, & 1/8	Two Xenoy Plugs	ABS Green
2410SL	10	4/12, 2/10, & 1/8	Two Xenoy Plugs	ABS Green
2412SL	12	4/12, 2/10, & 1/8	Two Xenoy Plugs	ABS Green
2415SL	15	4/12, 2/10, & 1/8	Two Xenoy Plugs	ABS Green
2608SL	8	6/12 & 1/10	Two Xenoy Plugs	Standard Black
2610SL	10	6/12 & 1/10	Two Xenoy Plugs	Standard Black
2612SL	12	6/12 & 1/10	Two Xenoy Plugs	Standard Black
2615SL	15	6/12 & 1/10	Two Xenoy Plugs	Standard Black
2808SL	8	6/14 & 1/12	Two Xenoy Plugs	Economy Black
2810SL	10	6/14 & 1/12	Two Xenoy Plugs	Economy Black
2812SL	12	6/14 & 1/12	Two Xenoy Plugs	Economy Black
2815SL	15	6/14 & 1/12	Two Xenoy Plugs	Economy Black

Straight With ISO Corrosion Resistant Xenoy Plugs

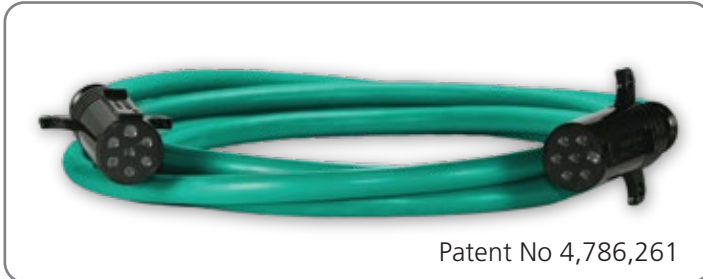

- Destruction Proof Xenoy Plugs
- Tight Fitting Spring Loaded "D" Contacts
- Chamfer Cable Guard
- Three Year Warranty

Catalog NO.	Working Length Ft.	7 conductor AWG Size Combination	Lead & Plugs	Cable Duty & Color
2408SLX	8	4/12, 2/10, & 1/8	Two ISO Plugs	ABS Green
2410SLX	10	4/12, 2/10, & 1/8	Two ISO Plugs	ABS Green
2412SLX	12	4/12, 2/10, & 1/8	Two ISO Plugs	ABS Green
2415SLX	15	4/12, 2/10, & 1/8	Two ISO Plugs	ABS Green

Coiled With ISO Corrosion Resistant Xenoy Plugs



- Destruction Proof Xenoy Plugs
- Tight Fitting Spring Loaded "D" Contacts
- Chamfer Cable Guard
- Three Year Warranty

Catalog NO.	Working Length Ft.	7 conductor AWG Size Combination	Lead & Plugs	Cable Duty & Color
2412CLX	12	4/12, 2/10, & 1/8	Two ISO Plugs	ABS Green
2415CLX	15	4/12, 2/10, & 1/8	Two Xenoy Plugs	ABS Green
241540CL2X	15	4/12, 2/10, & 1/8	Two Xenoy Plugs With 40" Lead	ABS Green

Straight Air Hose Assemblies



- Meets DOT FMVSS 106 Regulations
- Maximum performance even at -70 degrees below zero performance
- More durable than rubber hoses
- One Year Warranty

Catalog NO.	Working Length Ft.	I.D.	Wall	Fittings	Description
60012SBR	12'	.375"	.123"	1/2"x1/2"	Set: Blue & Red
60012SB	12'	.375"	.123"	1/2"x1/2"	1 Blue
60012SR	12'	.375"	.123"	1/2"x1/2"	1 Red
60015SBR	15'	.375"	.123"	1/2"x1/2"	Set: Blue & Red
60015SB	15'	.375"	.123"	1/2"x1/2"	1 Blue
60015SR	15'	.375"	.123"	1/2"x1/2"	1 Red
60020SBR	20'	.375"	.123"	1/2"x1/2"	Set: Blue & Red
60020SB	20'	.375"	.123"	1/2"x1/2"	1 Blue
60020SR	20'	.375"	.123"	1/2"x1/2"	1 Red
63812SBR	12'	.375"	.123"	3/8"x1/2"	Set: Blue & Red
63812SB	12'	.375"	.123"	3/8"x1/2"	1 Blue
63812SR	12'	.375"	.123"	3/8"x1/2"	1 Red
63815SBR	15'	.375"	.123"	3/8"x1/2"	Set: Blue & Red
63815SB	15'	.375"	.123"	3/8"x1/2"	1 Blue
63815SR	15'	.375"	.123"	3/8"x1/2"	1 Red



PHILATRON Standard Coiled Air Lines

The 400 Series

- Maximum performance even at -70 degrees below zero performance
- One Year Warranty
- Corrosion proof armor guards/sleeves, for added safety. No more abrasive tears and cuts

Catalog NO.	Working Length Ft.	Tail Length (Inches)	Inside Diameter (Inches)	Wall Thickness (Inches)	Brass Fitting Size	Description
40012CBR	12'	2 - 10"	.375"	.078"	1/2" X 1/2"	Set: Red & Blue
40012CB	12'	2- 10"	.375"	.078"	1/2" X 1/2"	1 - Blue
40012CR	12'	2- 10"	.375"	.078"	1/2" X 1/2"	1 - Blue
40015CBR	15'	2 - 10"	.375"	.078"	1/2" X 1/2"	Set: Red & Blue
40015CB	15'	2- 10"	.375"	.078"	1/2" X 1/2"	1 - Blue
40015CR	15'	2- 10"	.375"	.078"	1/2" X 1/2"	1 - Blue
4001240CB R	12'	10" & 40"	.375"	.078"	1/2" x 1/2"	Set: Red & Blue
4001240CB	12'	10" & 40"	.375"	.078"	1/2" x 1/2"	1 Blue
4001240CR	12'	10" & 40"	.375"	.078"	1/2" x 1/2"	1 Red
4001540CB R	15'	10" & 40"	.375"	.078"	1/2" x 1/2"	Set: Red & Blue
4001540CB	15'	10" & 40"	.375"	.078"	1/2" x 1/2"	1 Blue
4001540CR	15'	10" & 40"	.375"	.078"	1/2" x 1/2"	1 Red
40020CBR	20'	2 - 10"	.375"	.078"	1/2" X 1/2"	Set: Red & Blue
40020CB	20'	2- 10"	.375"	.078"	1/2" X 1/2"	1 - Blue
40020CR	20'	2- 10"	.375"	.078"	1/2" X 1/2"	1 - Blue

STALLION



Three Year Warranty

Fact: All Nylon Air Lines Will Eventually Fail due to Cracking. See Flexing Cycle Below.

Coiled Air Lines
The BEST in the Industry

The 600 Series


STALLION™ Power Air Lines

Twice the thickness of ordinary air lines

- Reinforced sidewalls
- 2X Thick Wall Than Nylon Brands
- Corrosion Proof Armor Guard™
- Air Assemblies come with Glad Grips
- Anti-kinking
- Prevents Wear & Tear on Tires
- Superior Coil Memory
- Anti-Sagging Material
- DOT Certified, OEM Approved
- Durable and Reliable
- Tight Fitting-No Air Leaks!
- Infrequent Replacement, Down Time is Eliminated
- Performance in Virtually all Conditions: -85°F to +260°F

STALLION vs. Nylon Brands

STALLION Air Lines

√  TWICE as thick as other brands!
.123" Wall

√ NO FAILURE - Even after ONE MILLION flexing cycles!

√ GUARANTEED - No problems in cold weather to -70 °F.vv

√ Warranty: THREE YEA

Nylon Brands

√  Thin wall.
.062" Wall

√ 3 Major brands cracked open after just 3,060, 8,460, and 51,600 flexing cycles.

√ Often breaks in cold weather.

√ Warranty: One year or less.

STALLION *The 600 Series*



Our Best Coiled Air Lines

- Meets Dot FMVSS 106 Regulations
- Includes glad hand grips
- Extra Heavy Duty Service
- Maximum performance even at -85 degrees below zero performance
- Corrosion proof armor guard/sleeves, for added safety. No more abrasive tears and cuts.
- Three Year Warranty
(See previous page for more details)

Catalog NO.	Working Length Ft.	Tail Length (Inches)	Inside Diameter (Inches)	Wall Thickness (Inches)	Brass Fitting Size	Description
60012CBR	12'	Two 10"	.375"	.123"	1/2" x 1/2"	Set: 1 Red & 1 Blue
60012CB	12'	Two 10"	.375"	.123"	1/2" x 1/2"	1 Blue
60012CR	12'	Two 10"	.375"	.123"	1/2" x 1/2"	1 Red
60015CBR	15'	Two 10"	.375"	.123"	1/2" x 1/2"	Set: 1 Red & 1 Blue
60015CB	15'	Two 10"	.375"	.123"	1/2" x 1/2"	1 Blue
60015CR	15'	Two 10"	.375"	.123"	1/2" x 1/2"	1 Red
6001240CBR	12'	10" & 40"	.375"	.123"	1/2" x 1/2"	Set: 1 Red & 1 Blue
6001240CB	12'	10" & 40"	.375"	.123"	1/2" x 1/2"	1 Blue
6001240CR	12'	10" & 40"	.375"	.123"	1/2" x 1/2"	1 Red
6001540CBR	15'	10" & 40"	.375"	.123"	1/2" x 1/2"	Set: 1 Red & 1 Blue
6001540CB	15'	10" & 40"	.375"	.123"	1/2" x 1/2"	1 Blue
6001540CR	15'	10" & 40"	.375"	.123"	1/2" x 1/2"	1 Red
60020CBR	20'	Two 10"	.375"	.123"	1/2" x 1/2"	Set: 1 Red & 1 Blue
60020CB	20'	Two 10"	.375"	.123"	1/2" x 1/2"	1 Blue
60020CR	20'	Two 10"	.375"	.123"	1/2" x 1/2"	1 Red
63812CBR	12'	Two 10"	.375"	.123"	3/8" x 1/2"	Set: 1 Red & 1 Blue
63812CB	12'	Two 10"	.375"	.123"	3/8" x 1/2"	1 Blue
63812CR	12'	Two 10"	.375"	.123"	3/8" x 1/2"	1 Red
63815CBR	15'	Two 10"	.375"	.123"	3/8" x 1/2"	Set: 1 Red & 1 Blue
63815CB	15'	Two 10"	.375"	.123"	3/8" x 1/2"	1 Blue
63815CR	15'	Two 10"	.375"	.123"	3/8" x 1/2"	1 Red

ALASKAN STALLION™

The A-600 Series **The Ultimate Safer Sub-Zero Air Hose**

The only air hoses that offer
**Superior Anti-Kinking and Extra Flexibility in
Sub-Zero Temperatures in the industry!**

In a world full of uncertainty, isn't it nice to know that some products reliably perform as promised. Imagine how much time and money you will save during the years if your air lines are not an annual cold winter concern. The down-time savings alone mean more time where it counts... on the road.

What makes ALASKAN STALLION™ outperform other air lines on the market? In addition to its anti kinking design, ALASKAN STALLION™ air lines are made of a patented compound that delivers a reinforced, dual stage wall that is twice as thick as Nylon air lines. So, unless your travels take you to conditions more challenging than the Arctic or more hostile than Death Valley at the peak of summer, you will not need to consider your air lines for quite some time to come.

ALASKAN STALLION™

Benefits:

- Safer Anti-kinking Design
- Double the Wall Thickness of Nylon Brands
- Corrosion Proof Armor Guard™
- Superior, Long Term Coil Memory
- Anti-Sagging Engineering & Construction
- Durability and Reliable
- Always Tight Fitting – No Air Leaks!
- Long Term Performance, Infrequent Replacement
- Minimum down Time, Maximum Road Time
- Performance in Virtually all Conditions:
From -100F° to +260F°

Three Year Warranty

ALASKAN STALLION™ *The A-600 Series* Sub-Zero Air Hoses

Part No.	Description	
A60012CBR	12' Set Blue & Red 1/2" Fittings	SET
A60012CB	12' Blue 1/2" Fittings	EA
A60012CR	12' Red 1/2" Fittings	EA
A60015CBR-B	15' Set Blue & Red 1/2" Fittings	BARREL
A60015CBR	15' Set Blue & Red 1/2" Fittings	SET
A60015CB	15' Blue 1/2" Fittings	EA
A60015CR	15' Red 1/2" Fittings	EA
A6001518CBR	15' Set Blue & Red w/18" 1/2" Fittings	SET
A6001518CB	15' Blue w/18" 1/2" Fittings	EA
A6001518CR	15' Red w/18" 1/2" Fittings	EA
A6001240CBR	12' Set Blue & Red w/40" 1/2" Fittings	SET
A6001240CB	12' Blue w/40" 1/2" Fittings	EA
A6001240CR	12' Red w/40" 1/2" Fittings	EA
A6001540CBR	15' Set Blue & Red w/40" 1/2" Fittings	SET
A6001540CBR-B	15' Set Blue & Red w/40" 1/2" Fittings	BARREL
A6001540CB	15' Blue w/40" 1/2" Fittings	EA
A6001540CR	15' Red w/40" 1/2" Fittings	EA
A6001548CBR	15' Set Blue & Red w/48" 1/2" Fittings	SET
A6001548CB	15' Blue w/48" 1/2" Fittings	EA
A6001548CR	15' Red w/48" 1/2" Fittings	EA
A60020CBR	20' Set Blue & Red 1/2" Fittings	SET
A60020CB	20' Blue 1/2" Fittings	EA
A60020CR	20' Red 1/2" Fittings	EA
A63812CBR	12' Set Blue & Red 3/8" & 1/2" Fittings	SET
A63812CB	12' Blue 3/8" & 1/2" Fittings	EA
A63812CR	12' Red 3/8" & 1/2" Fittings	EA
A63815CBR	15' Set Blue & Red 3/8" & 1/2" Fittings	SET
A63815CB	15' Blue 3/8" & 1/2" Fittings	EA
A63815CR	15' Red 3/8" & 1/2" Fittings	Ea
A6381540CBR	15' Set B & R w/40" 3/8" & 1/2" Fittings	Set



**Barrels
available
for the
following:**

Stallion Coiled Cables with Xenoy Plugs: 3 Year Warranty

Catalog NO.	Description	Unit Pack	Std Pk
2415CLB	ABS 15' 4/12, 2/10 & 1/82 Plugs	Barrel	40 Per Barrel
241540CL2-B	ABS 15' 4/12, 2/10 & 1/8w/40" 2 Plugs	Barrel	30 Per Barrel
2615CL-B	STD 15' 6/12 & 1/102 Plugs	Barrel	50 Per Barrel

Stallion Coiled air Lines: 3 Year Warranty

Catalog NO.	Description	Unit Pack	Std Pk
60015CBR	Stallion 15' set Blue & Red 1/2" fittings	Barrel	20 Sets Per Barrel
6001540CBR	Stallion 15' set Blue & Red w/40" 1/2" fittings	Barrel	16 Sets Per Barrel

ALASKAN Stallion Coiled Air Lines: 3 Year Warranty

Catalog NO.	Description	Unit Pack	Std Pk
A60015CBR-B	Alaskan 15' set Blue & Red 1/2" fittings	Barrel	20 Sets Per Barrel
A6001540CBR-B	Alaskan 15' set Blue & Red w/40" 1/2" fittings	Barrel	16 Sets Per Barrel

Coiled Lift Gate Cables



- Strong Die Cast Zinc Plug
- Extra Flexible ASTM K Copper Stranding
(See next page)


Catalog NO.	Working Length Ft.	I.D.	Wall	Fittings	Description
13612	12 Feet	6 AWG	110	2 Single Pole Plugs with Cable Lugs	Charging
13615	15 Feet	6 AWG	110	2 Single Pole Plugs with Cable Lugs	Charging
13412	12 Feet	4 AWG	200	2 Single Pole Plugs with Cable Lugs	Charging & Intermittent Direct
13415	15 Feet	4 AWG	200	2 Single Pole Plugs with Cable Lugs	Charging & Intermittent Direct
13212	12 Feet	2 AWG	300	2 Single Pole Plugs with Cable Lugs	Charging & Intermittent Direct
13215	15 Feet	2 AWG	300	2 Single Pole Plugs with Cable Lugs	Charging & Intermittent Direct

The ULTIMATE GROUNDING CABLE

durable compact grounding cable for 5th wheel! application is only 5 inches retracted will easily stretch to 4 feet and it will never sag!



Part No. 4232014

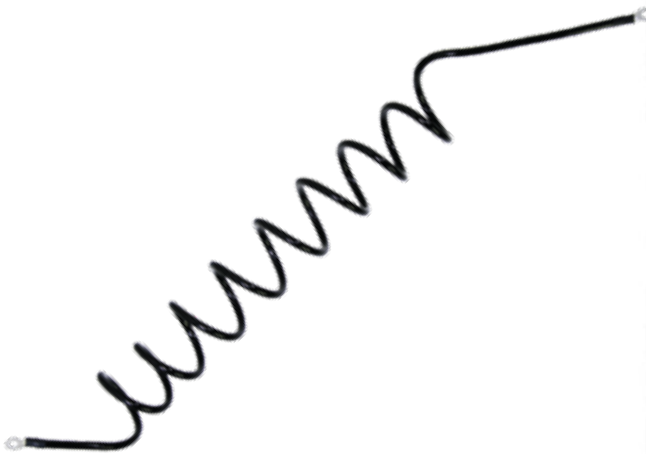

The Ultimate Grounding Cable

– A Customer's Preference

The Ultimate Grounding Cable is a customer's preference! But if you have had issues with your pigtails not functioning and frequently experience flickering lights; or you have had too much grease on fifth wheel where that does not provide for a good connection between tractor and trailer then the smart choice is to make sure you avoid DOT violations by having a better ground between the tractor to trailer. You can also avoid maintenance issues and costs from sagging cables, choose the smart appearance of Philatron Ultimate Grounding Cable.

- Extra Support and Better Ground Connection
- Better Electrical Conductivity between Tractor and Trailer
- Avoid DOT violations and citations for flickering lights and for maintenance issues
- Compact not cumbersome
- Only 5 inches retracted and will easily stretch to 4 feet!
- Patented " large loop " Coiled Cords
- Large Coil Diameter allows for compact retractable length cables
- Patent allows for longer extended lengths from a retracted coil position
- No Sagging or Dragging
- Innovative Design, Indestructible Construction
- Superior Performance
- Durable Jacket Resists Chemicals & Abrasion
- Withstands Ozone, Water, Cutting and Fuels
- Light Weight, Retains Memory
- Ideal Space Saver for areas where bulkiness is undesirable
- Coiled Cords are a preference to straight for cable management
- A nice compliment to Philatron Trailer Cable Assemblies

Bulk Battery, Ground, Starter & Generator Cables



Catalog NO.	AWG Size	Stranding	O.D.
SGTU6	6	266X30	.322"
SGTU4	4	420X30	.392"
SGTU2	2	665X30	.458"
SGTU1	1	836X30	.557"
SGTU10	1/0	1064X30	.611"
SGTU20	2/0	1323X30	.630"
SGTU30	3/0	1666X30	.693"
SGTU40	4/0	2107X30	.787"

ULTRA FLEXIBLE - *UL Listed:*

Triple purpose:

SAE Type SGT, UL Type THW, & UL Type MTW

- ASTM Type K Stranding
- Complies with the USA National Electrical Code
- Complies with SAE Standards
- Rated 1000 Volts
- Oil and weather resistant
- Temperature: +105°C
- Suited For Electrical Power Diesel Generators
- Available Colors: Black & Red
- UL Listed under Philatron UL Listing for 1000 volt MTW & THW cables

SAE TYPE SGT - *UL Listed:*

- Complies to SAE Standards
- Temperature Rating +80°C
- Available Cable Colors: Black & Red

Catalog NO.	AWG Size	Stranding	O.D.
SGT6	6	40x22	.308"
SGT4	4	57x22	.350"
SGT2	2	98x22	.455"
SGT1	1	122x22	.490"
SGT10	1/0	155x22	.535"
SGT20	2/0	196x22	.585"
SGT30	3/0	248x22	.675"

Bulk Trailer Cables

Complies with SAE & ATA Specifications



Conductors Color Codes:

- 1: Black, Brown, Red, White
- 2: Black, Yellow, Red, White
- 3: Black, Brown, Green, Red, White, Yellow
- 4: Black, Blue, Brown, Green, Red, Yellow, White

Catalog No.	Type	Temp. Range	SIZE AWG	Conductors	Stranding	O.D.	Color Code	Cable Color
TCP164	PVC	+80°C -40°C	16	4	19	.320"	1	Black
TCP144	PVC	+80°C -40°C	14	4	19	.440"	2	Black
TCP146	PVC	+80°C -40°C	14	6	19	.525"	3	Black
TCP147	PVC	+80°C -40°C	14	7	19	.525"	4	Black
TCP14127	PVC	+80°C -40°C	14 12	61	19 19	.525"	4	Black
TCP12107	PVC	+80°C -40°C	12 10	61	19 19	.610"	4	Black
TCP121087	PVC	+80°C -40°C	12 10 8	421	19 19 168	.660"	4	Green

Catalog No.	Type	Temp. Range	Size AWG	Color Code	Stranding	O.D.	Color Code	Cable Color
TCR144	Rubber	+105°C -70°C	14	4	19	.440"	2	Black
TCR146	Rubber	+105°C -70°C	14	6	19	.525"	3	Black
TCR147	Rubber	+105°C -70°C	14	7	19	.525"	4	Black
TCR14127	Rubber	+105°C -70°C	14 12	61	19 19	.525"	4	Black
TCR12107	Rubber	+105°C -70°C	12 10	61	19 19	.610"	4	Black
TCR121087	Rubber	+105°C -70°C	12 10 8	421	19 19 168	.660"	4	Green

Shop & Cab Accessories

Part No. **S16310G**



- Extends from 5" to 10 feet
- Office, Shop and Lighting
- Indoor and Outdoor
- 13 Amps/1625 Watts
- Easy Storage
- Grey with Black Connectors
- Male & Female molded Connectors
- UL Listed

FLEXY-CORD® COILED EXTENSION CORD

Catalog NO.	Working Length	AWG Size	AMPs
S16310G	10 Feet	16/3	13
S16320G	20 Feet	16/3	13
S16345G	45 Feet	16/3	13

Part No. **S16320G**



Part No. **S16345G**

- Extends from 20" to 45 feet
- For Appliance use, Medium and Large, Vacuum, Hand Drills, Saws, Hedgers, Truck Cab, Professional Contractors
- Indoor and Outdoor
- 13 Amps/1625 Watts
- Easy Storage, excellent Coiled Cord Management
- Grey with Black Connectors
- Male & Female Molded Connectors
- UL Listed

- Extends from 10" to 20 feet
- For Home, Vacuum Cleaner, Shop, Hand Drills, Saws, Hedgers, and Professional Contractors
- Indoor and Outdoor
- 13 Amps/1625 Watts
- Easy Storage, excellent Coiled Cord Management
- Grey with Black Connectors
- Male & Female Molded Connectors
- UL Listed

See Our Complete Line of FlexyCords...Visit flexycord.com

Booster Cables



Super Tiger®

- For Bir Rigs
- Tiger Pouch*
- Compact Size - Pouch Diameter just 9"
- Guaranteed To Start Any Big Rig!

Catalog NO.	AWG	Length
BCST10	16,540 CM	10

*Available in private label pouches



Tiny Tiger®

- For Standard Vehicles and Motocicles
- Leopard Pouch*
- Compact Size - Puch Diameter just 8"
- Guaranteed to Start Any Standard Car

Catalog NO.	AWG	Length
BCTT10	10,385 CM	10

*Available in private label pouches

Heavy Duty

- 500 Amps - Direct Contact Clamps
- Black Pouch*

Catalog NO.	AWG	Length	Package
BC612	6	12	Black Pouch
BC412	4	12	Black Pouch
BC416	4	16	Black Pouch
BC420	4	20	Black Pouch
BC225	2	25	Black Pouch

*Available in private label pouches



Towing Lights

Ideal for moving wide loads & Towed vehicles



COILED SET

- Strong Magnets For Extra Security
- Self Coiling Cables For Easier Handling
- 4 Way Tested Plug
- Destruction Proof Lens & Buckets
- Night Light - Stop & Turn Signals



STRAIGHT SET

- Strong Magnets for Extra Security
- 4 Way Tested Plug
- Destruction Proof Lens & Buckets
- Night Light - Stop & Turn Signals

Catalog NO.	Working Length
13525	30 Feet

Notes



PHILATRON

WIRE AND CABLE • USA MANUFACTURER



15315 Cornet Avenue Santa Fe Springs, California 90670

(562) 802 2570 • Toll Free: (800) 421 3547 • Fax: (562) 802 0264 • philatron.com